


Window Lock
Stile :

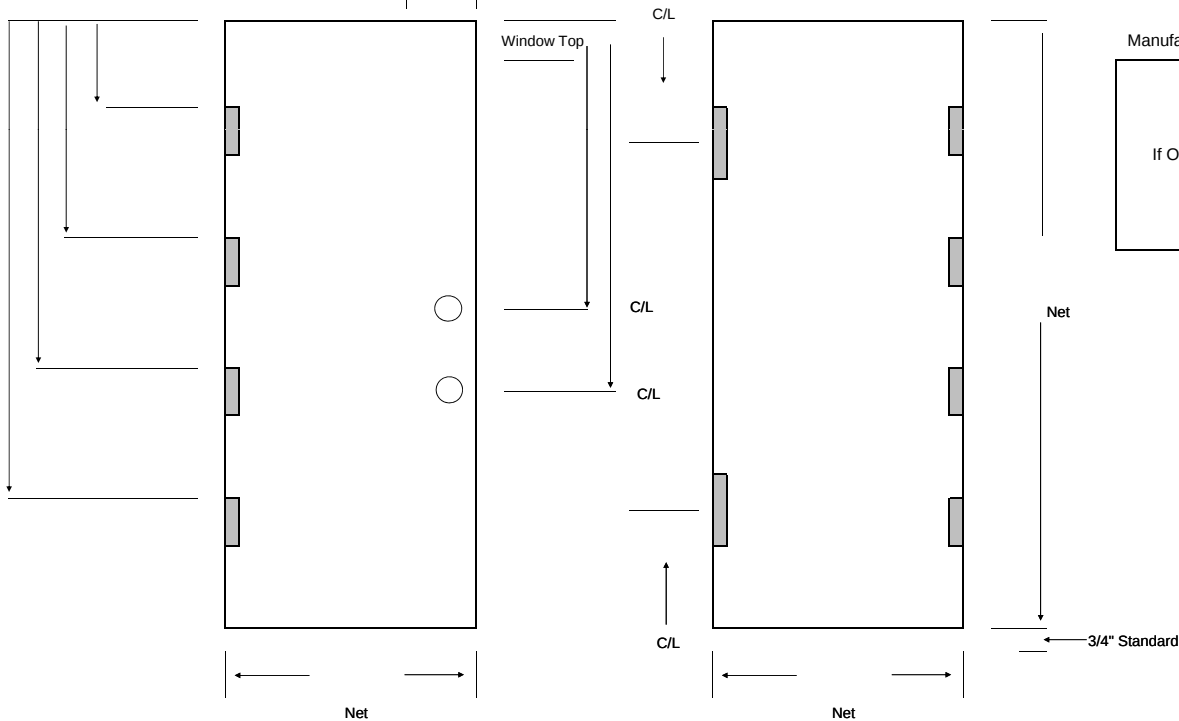

Manufacturer's Locations

If Other List Below

Series :	☐ SW - seamless welded	☐ LS - lockseam
Net Door Size :		
Frame Opening Size :		
Hinge :		
Lock :		
Strike :	Flushbolts:	
Closer :		
Astragals :		
Thickness :		
Core :	☐ Steel Stiffened - "SW" series only	☐ Honeycomb
	☐ Polystyrene	☐ Temp Rise
Gauge :	☐ 18	☐ 16
	☐ 14	☐ 2
Material :	☐ A60 galvanealled (std) ☐ G90 galvanized (opt) ☐ 304-4 stainless (opt)	
Edge :	☐ Square ☐ Bevel	
Top Cap :	☐ Inverted (std) ☐ Flush (opt)	
Primed / Unprimed :		

Vision Cut-Out Size	_____
Cut-Out Type	_____
Integral Vision Kit Visible Glass Size	_____
Glass Thickness	_____
Anemostat Model #	_____
HMX To Supply Kit	_____

Instructions :	_____

Qty. :	Handing :	Fire Label :	Mark #'s :

HOLLOW METAL X PRESS

Paired Door Order Form

Company Name :	PO #	Job Name :	Pg #
----------------	------	------------	------